
versatile™ 4C Surface Mount Collar, SM11D 17¹½6" ACTUAL — — 32¾" ACTUAL — DEPTH 41¹⁵/₁₆" ACTUAL 26½" FROM FINISHED FLOOR TO BOTTOM OF COLLAR FINISHED FLOOR

Notes

- Designed to mount Florence Versatile[™] 4C mailbox double column 11-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES: VERSATILETM 4C SURFACE MOUN	VERSATILETM 4C SURFACE MOUNT COLLAR					
	MODEL SM11D		REV	В		
	SCALE	NONE	LAS 7	t rev date 7/02/2014		
	DRAWING	NUMBER		DRAWN BY		
	SI	MIIDCS		TNS		

versatile™ 4C Mailbox, 4C11D-10

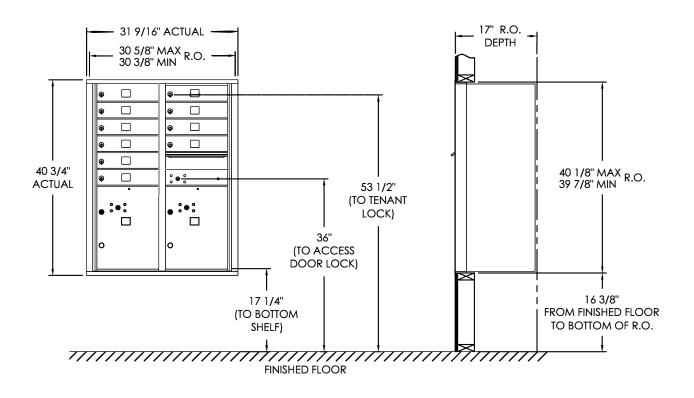

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	10
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL5	17" H x 12" W x 15" D	2

Notes:

This module meets the installed per the dime

talled per the dime this drawing.
a. At least one cu this drawing.
nt shall be positioned less then 48" above finished floor (AFF).

b. No parcel locke

helf) shall be positioned less than 15" AFF.

equirements for installation defined below when the mailbox is

c. No patron (ten: psitioned more than 67" AFF.

- d. No customer companies (unenor bottom shelf) shall be positioned less than 28" AFF.
- e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL 4C11D-10 REV E	
SCALE NONE LAST REV DATE 1/26/21	ATE
DRAWING NUMBER DRAWN BY	3Y
4C11D-10CS NBC	