
# versatile™ 4C Surface Mount Collar, SM06D 17<sup>1</sup>/<sub>16</sub>" ACTUAL - 32 $\frac{3}{8}$ " ACTUAL — DEPTH 24½" ACTUAL $26\frac{1}{16}$ " FROM FINISHED FLOOR TO BOTTOM COLLAR FINISHED FLOOR

### Notes:

- Designed to mount Florence Versatile<sup>™</sup> 4C mailbox double column 6-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES: VERSATILETM 4C SURFACE MOL	SERIES: VERSATILETM 4C SURFACE MOUNT COLLAR				
	MODEL SM06D	REV	B		
	SCALE NONE		t rev date <b>7/02/2014</b>		
	DRAWING NUMBER	•	DRAWN BY		
	SM06DCS		TNS		

# versatile™ 4C Mailbox, 4C06D-05X

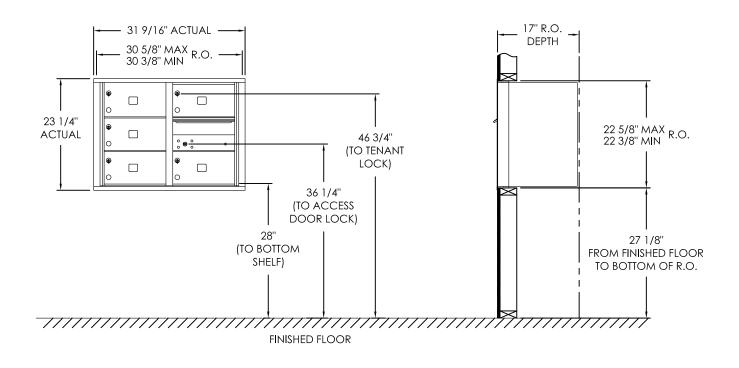

# COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	5
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

## Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

MODEL	4C06D-05X	REV	D	
SCALE	NONE	LAS	t rev date 06/28/19	
DRAWIN	G NUMBER		DRAWN BY	
4C	4C06D-05XCS		RAK	