INSTALLATION OF OPTIONAL AUTH—FLORENCE SNAP ON TRIM

1400/1500, 1600/1700, 1450/1550 HORIZONTAL MAILBOXES)

MITER TRIM MATERIAL
AS REQUIRED

INSTALL MOUNTING CLIPS
AS SHOWN IN DETAIL

SNAP ON
TRIM
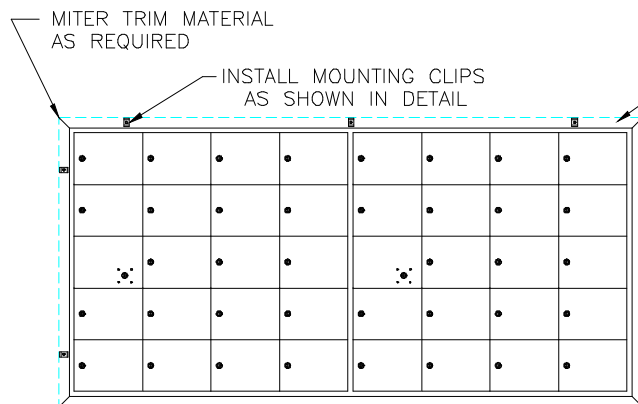
1. SCREW MOUNTING CLIP TO WALL
   USING 1/8" X 1-1/4" SCREWS
2. HOOK ONE EDGE OF TRIM OVER
   LEG OF CLIP AND SNAP TRIM
   OVER SECOND LEG OF CLIP

SNAP ON
TRIM

MOUNTING
CLIP

5/8"

NO. 1/8" X 1-1/4" SCREW
(P/N 51298)

TOP
OF MAILBOX

NOTE: WHEN SNAP ON
TRIM IS USED, MAILBOX
MUST PROJECT 3/8"
BEYOND FINISHED WALL

3/8"

DETAIL

CS2056