
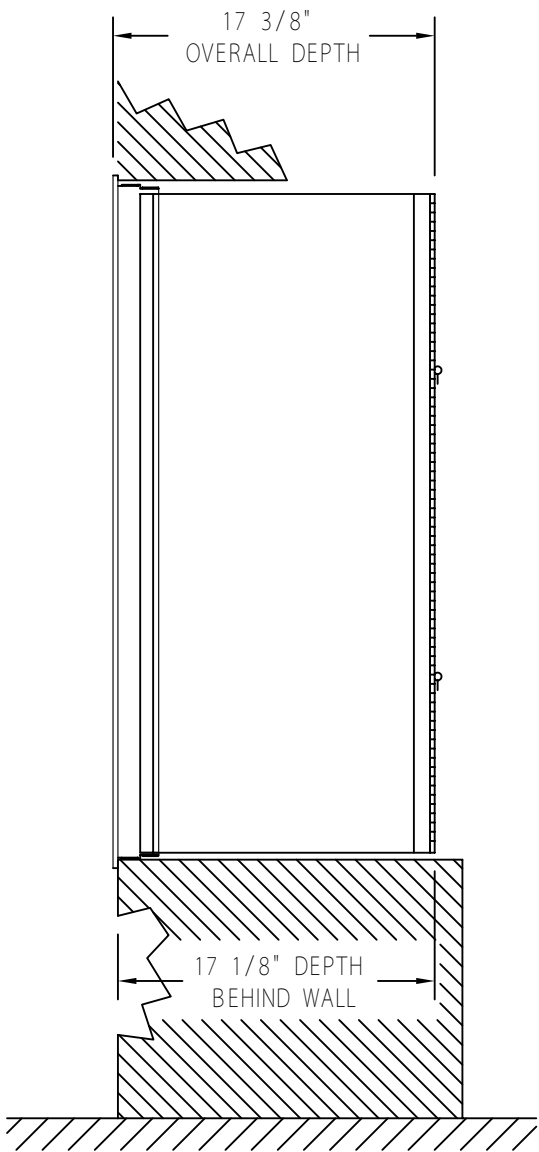


INSTALLATION REQUIREMENTS PER USPS STD-4C

- 1. AT LEAST ONE CUSTOMER MAILBOX COMPARTMENT SHALL BE POSITIONED LESS THAN 48" ABOVE FINISHED FLOOR (AFF).
- 2. NO PARCEL LOCKER COMPARTMENT (INTERIOR BOTTOM SHELF) SHALL BE POSITIONED LESS THAN 15" AFF.
- 3. NO CUSTOMER MAILBOX LOCK SHALL BE LOCATED MORE THAN 67" AFF.
- 4. NO CUSTOMER MAILBOX COMPARTMENT (INTERIOR BOTTOM SHELF) SHALL BE POSITIONED LESS THAN 28" AFF.

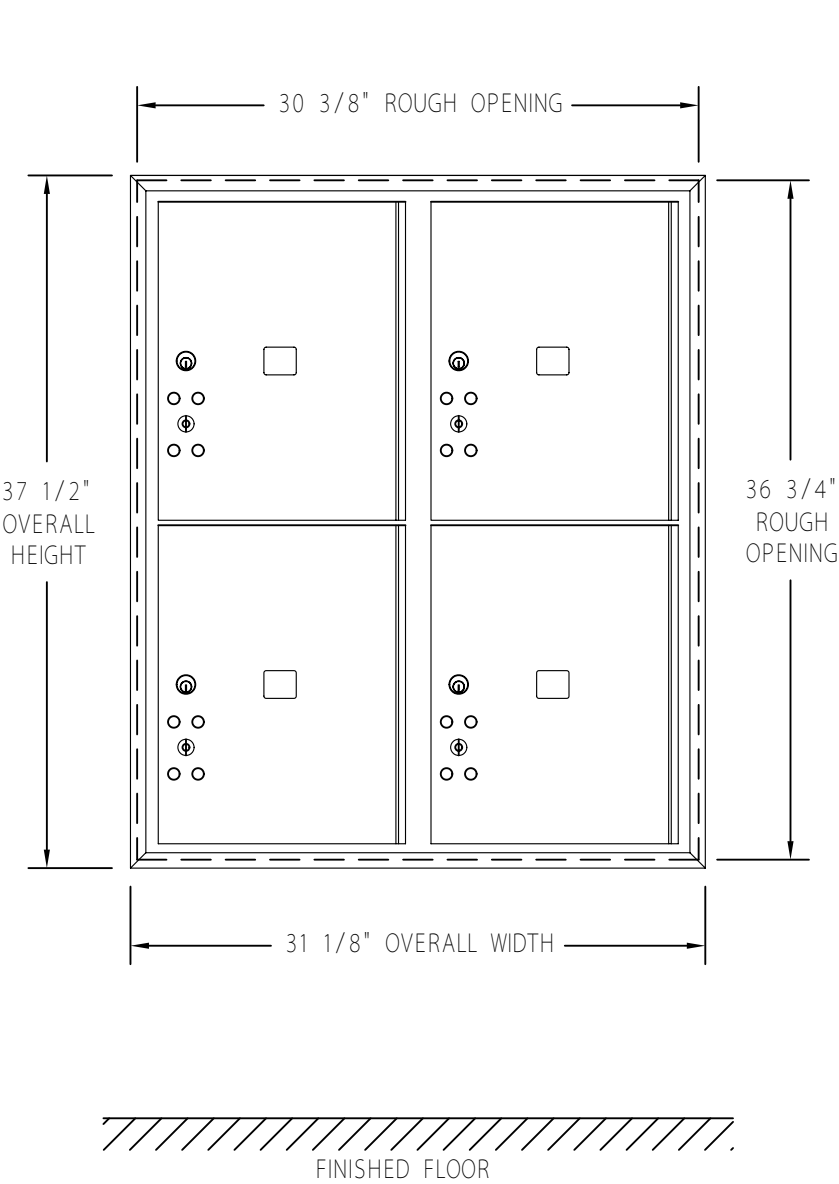

DRAWN WCL				MODEL 3710D - 4P
DATE 5/6/2013				DRAWING NO. CAD_3710D - 4PRL
CAD FILE SCALE 1 : 1		4C STANDARD HORIZONTAL MAILBOXES 3700 SERIES REAR LOADING AVAILABLE FOR USPS ACCESS OR PRIVATE ACCESS	(4) PL5 PARCEL LOCKERS	