


INSTALLATION REQUIREMENTS PER USPS STD-4C

1. AT LEAST ONE CUSTOMER MAILBOX COMPARTMENT SHALL BE POSITIONED LESS THAN 48" ABOVE FINISHED FLOOR (AFF).
2. NO PARCEL LOCKER COMPARTMENT (INTERIOR BOTTOM SHELF) SHALL BE POSITIONED LESS THAN 15" AFF.
3. NO CUSTOMER MAILBOX LOCK SHALL BE LOCATED MORE THAN 67" AFF.
4. NO CUSTOMER MAILBOX COMPARTMENT (INTERIOR BOTTOM SHELF) SHALL BE POSITIONED LESS THAN 28" AFF.

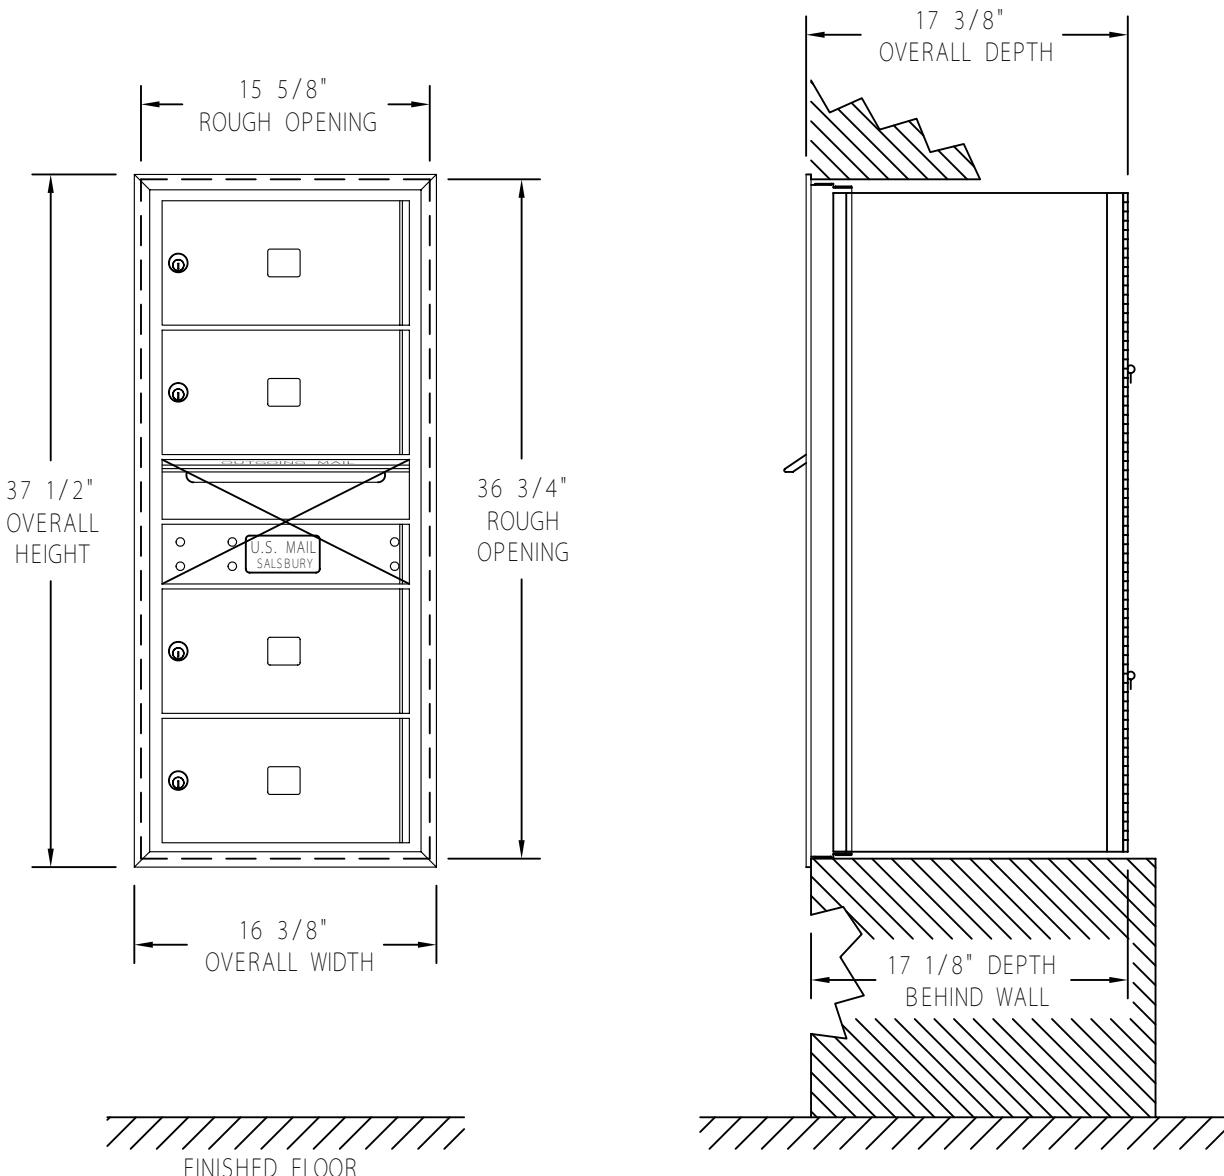

DRAWN	WCL
DATE	5/6/2013
CAD FILE SCALE	1 : 1

4C STANDARD HORIZONTAL MAILBOXES
3700 SERIES REAR LOADING
AVAILABLE FOR USPS ACCESS OR PRIVATE ACCESS

(4) MB2 MAILBOXES
(1) OM2 OUTGOING MAIL COMPARTMENT

MODEL	3710S - 04
DRAWING NO.	CAD_3710S - 04RL