





Place mounting plate over ballast stem and screw on locking ring

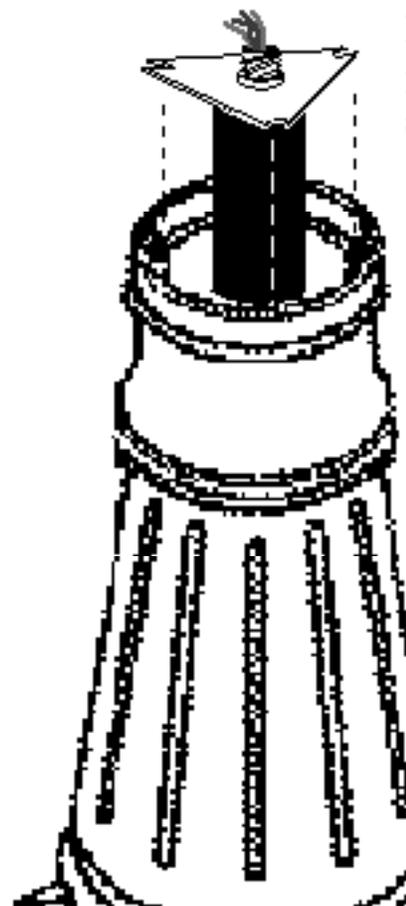

Align the slots in the plate with the screw holes in the base. Place top section over base and secure.

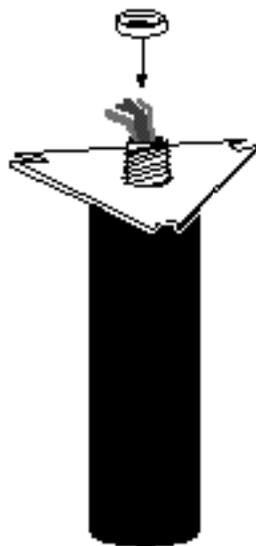